


INSTALLATION OF A HONEYCOMB VENTILATION PANEL INTO AN AIR DUCT

Bolt through air duct flanges and honeycomb ventilation panel, torque to 10-12 in./lb. on every bolt around the full perimeter of the honeycomb ventilation panel.

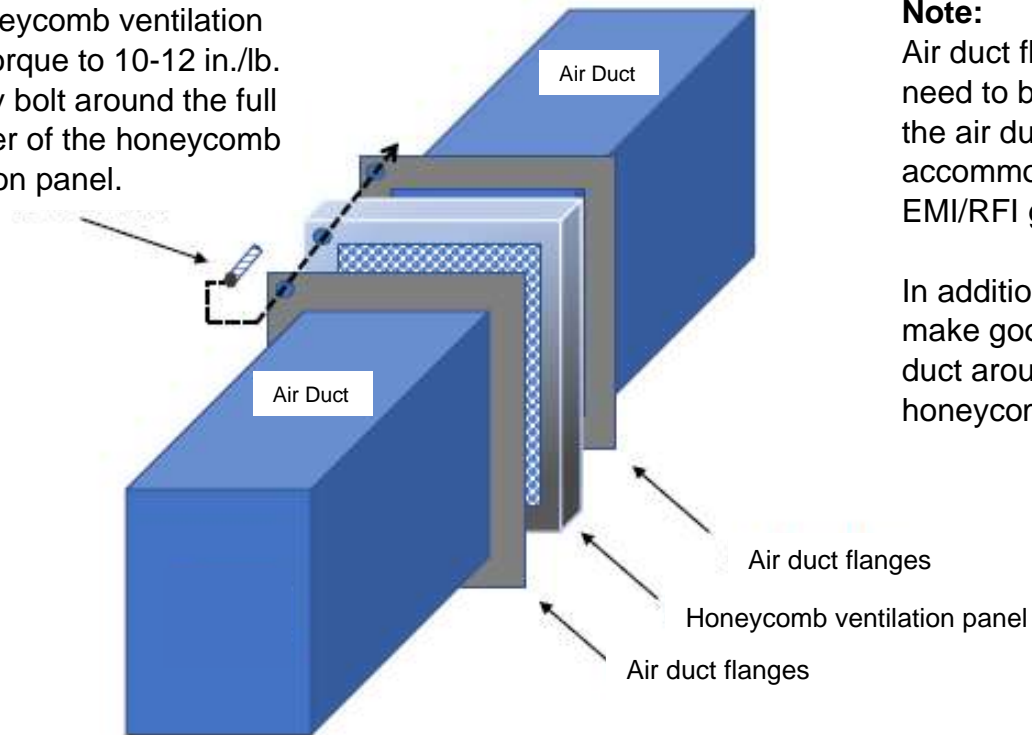

Note:

Air duct flanges – The air duct flanges need to be at a sharp 90 deg. angle from the air duct and have a 0.5 in. width to accommodate the area of the vent panel EMI/RFI gasket.

In addition, the EMI/RFI gasket needs to make good electrical contact to the air duct around the full perimeter of the honeycomb ventilation panel.

Michael J. Oliver

