



5240 Series Clip-on Mounting

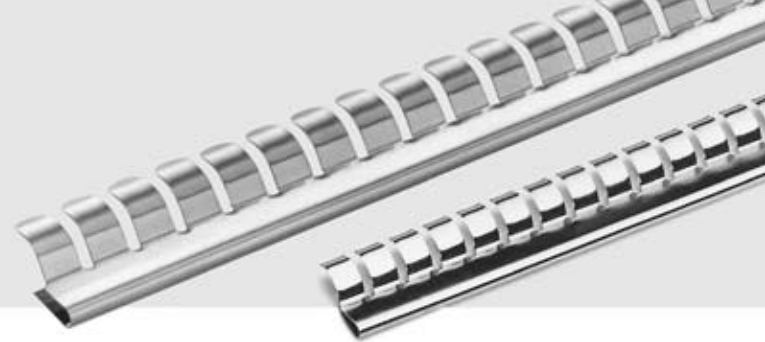

5240-01D70-XX

PERPENDICULAR CONTACT

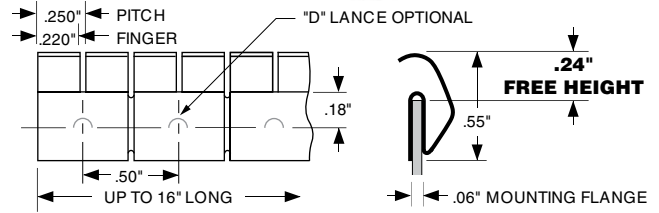


5240-02D40-XX

LOW PROFILE

Compression Force

	25% Compression (0.045")	50% Compression (0.030")
Standard	15 lbs/ft	83 lbs/ft
"TF" Style	6.6 lbs/ft	30 lbs/ft

Notes: Optional lance available as shown.
 (SS) Also available in Stainless Steel

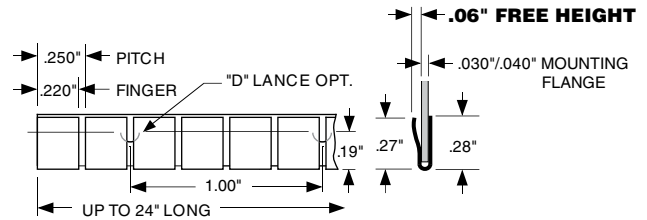


5240-07L09-XX

CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.075")	50% Compression (0.050")
	14 lbs/ft	49 lbs/ft
	4.5 lbs/ft	22 lbs/ft

Note: Non-standard lance location(s).

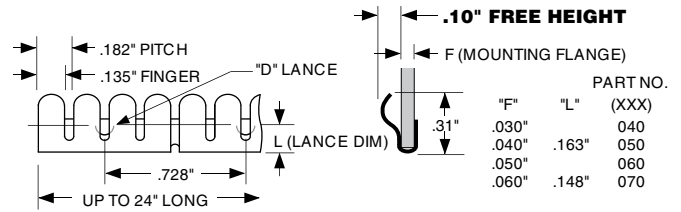


5240-09C03-XX

CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.105")	50% Compression (0.070")
	18 lbs/ft	N/A

* Consult factory for performance data.

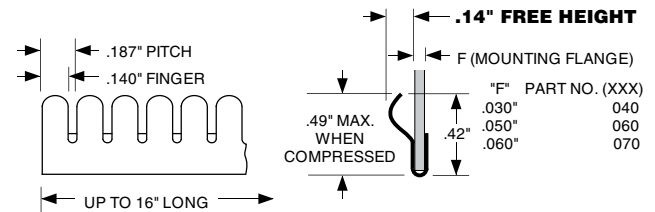


5240-10C70-XX

CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.120")	50% Compression (0.080")
Standard	11 lbs/ft	69 lbs/ft
"TF" Style	6.9 lbs/ft	21 lbs/ft

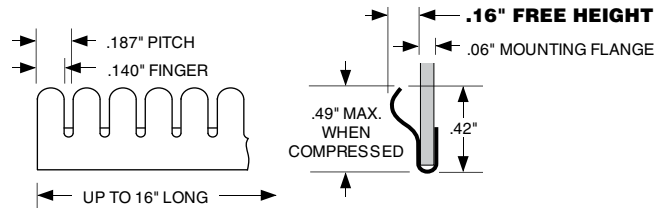


5240-11L80-XX

CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.158")	50% Compression (0.105")
Standard	3.5 lbs/ft	16 lbs/ft

* Note: Non-standard lance location(s).

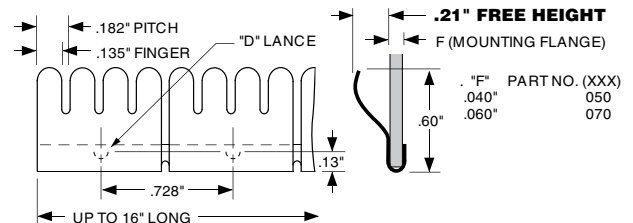

5240 Series Clip-on Mounting




5240-12E90-XX STRIP GASKETS

Compression Force

	25% Compression (0.195")	50% Compression (0.130")
Standard	17 lbs/ft	43 lbs/ft

Note: Drawing shown at reduced scale.

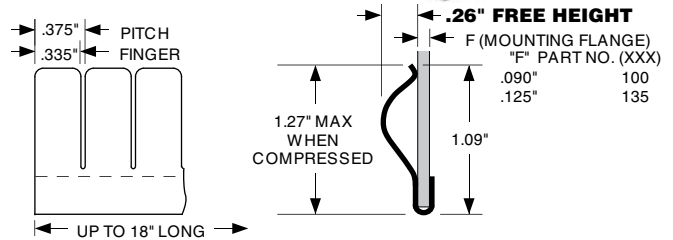


5240-14D27-XX REVERSE BEND CONTACTS

Compression Force

	25% Compression (0.203")	50% Compression (0.135")
Standard	5 lbs/ft	15 lbs/ft


Note: Non-standard lance location(s). Also available in 25 ft. rolls. Scores for break off between 1/2" increments optional.

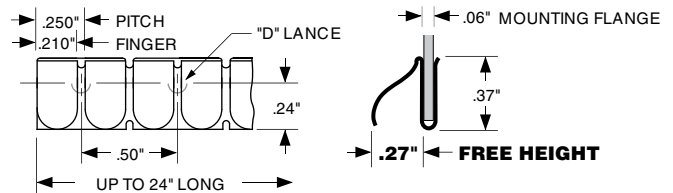

5240-17T16-XX TWISTED CONTACTS

Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard	10 lbs/ft	22 lbs/ft

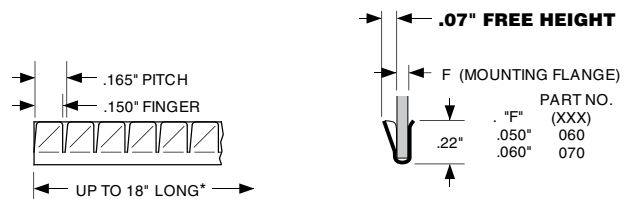


5240-18T95-XX TWISTED CONTACTS

Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard	32 lbs/ft	48 lbs/ft

Note: Optional lance available as shown.

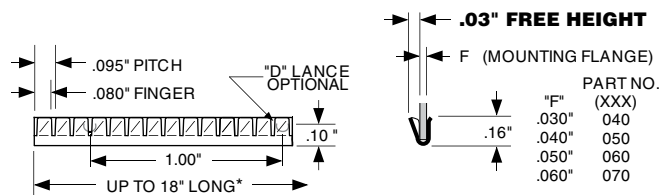


5240-19D42-XX NO-SNAG FINGERS

Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard	29 lbs/ft	69 lbs/ft
"TF" Style	15 lbs/ft	35 lbs/ft

* Note: Also available in .125" Pitch. (125M42CXXX)

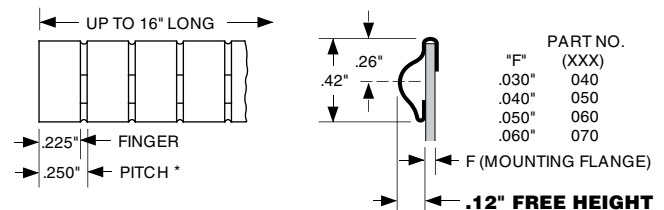

5240-20E70-XX SOFT NO-SNAG FINGERS

Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard	18 lbs/ft	36 lbs/ft

