

5220 Series Snap-on Mounting



5220-13I36-XX SOFT NO-SNAG FINGERS




GAP RANGE UP TO .068"

Standard



APPLICATION DATA

Notes:

1. Length of slot as required by number of fingers.
2. Spacing determined by attenuation requirements.



.08" (APPROXIMATE FREE HEIGHT WHEN INSTALLED WITH .320" SLOT SPACING ON .050" FLANGE)

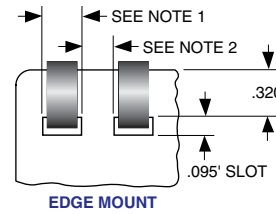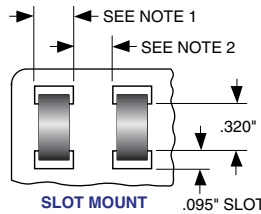

5230 Series Stick-on Mounting

• SEE PAGE 4 FOR HOW TO ORDER





5230-01C35-XX SOFT NO-SNAG FINGERS

Compression Force

	25% Compression (0.083")	50% Compression (0.055")
Standard	25 lbs/ft	89 lbs/ft
"TF" Style	6 lbs/ft	23 lbs/ft



Note: Also available with optional double adhesive transfer tape.

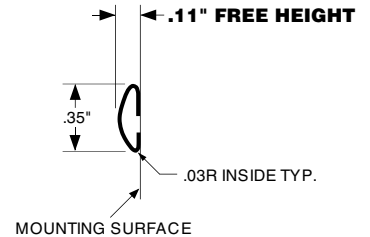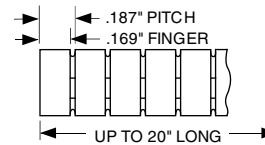

5230-02B28-XX LOW PROFILE NO-SNAG

Compression Force



	25% Compression (0.045")	50% Compression (0.030")
Standard	5.5 lbs/ft	20.4 lbs/ft

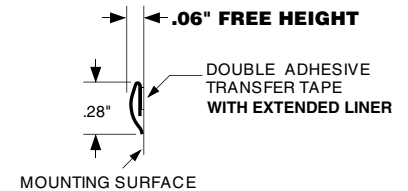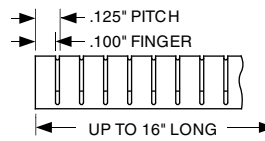


5230-03B32-XX LOW PROFILE NO-SNAG

Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard	6.8 lbs/ft	17 lbs/ft

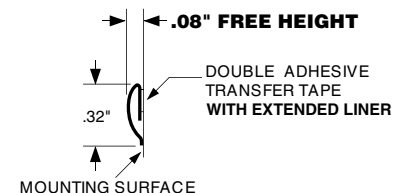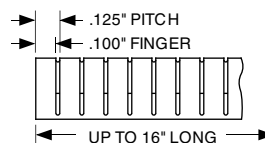

5230 Series Stick-on Mounting

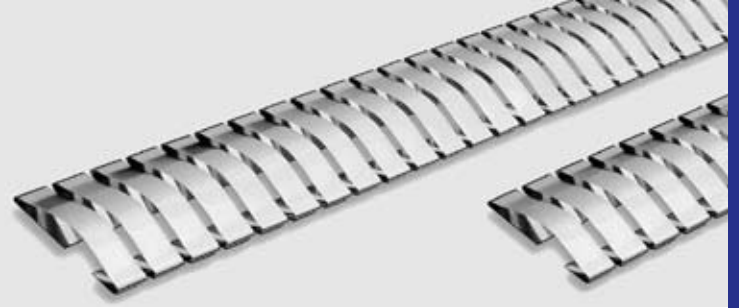


FINGERSTOCK - STICK-ON

5230-07B45-XX HOOK & STICK-ON LOW PROFILE NO-SNAG

Compression Force

25% Compression (0.045")	50% Compression (0.030")
10 lbs/ft	19 lbs/ft
6.4 lbs/ft	17 lbs/ft

Note: Also available in Stainless Steel

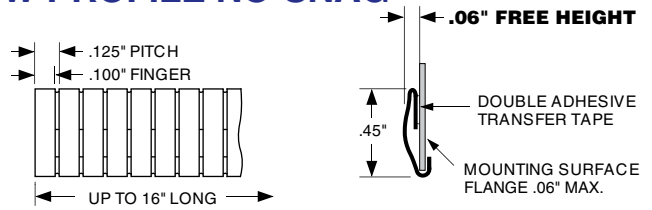


5230-08B60-XX HOOK & STICK-ON LOW PROFILE NO-SNAG

Compression Force

25% Compression (0.068")	50% Compression (0.045")
8.7 lbs/ft	17.3 lbs/ft
5.8 lbs/ft	9.0 lbs/ft


Note: Also available in Stainless Steel

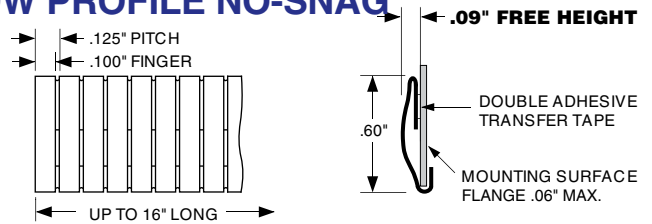

5230-09B60-XX HOOK & STICK-ON LOW PROFILE NO-SNAG

Compression Force


25% Compression (0.105")	50% Compression (0.070")
19 lbs/ft	35 lbs/ft
6.8 lbs/ft	14 lbs/ft

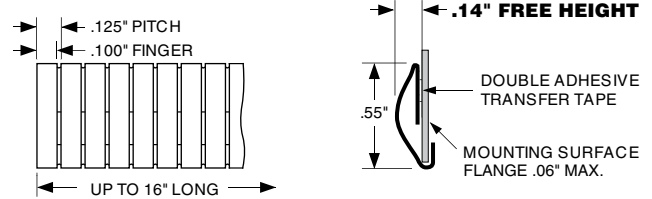

5230-10J21-XX SOFT NO-SNAG FINGERS

Compression Force


	25% Compression (0.060")	50% Compression (0.040")
Standard	11 lbs/ft	34 lbs/ft

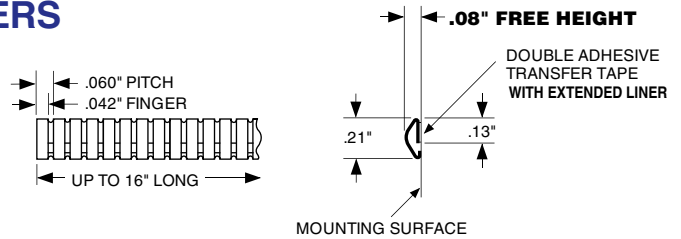

5230-11C21-XX SOFT NO-SNAG FINGERS

Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard	12 lbs/ft	24 lbs/ft

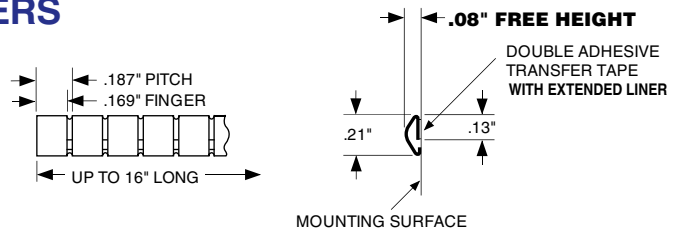


5230-12C28-XX SOFT FINGERS

Compression Force


	25% Compression (0.083")	50% Compression (0.055")
Standard	15 lbs/ft	32 lbs/ft

Note: Also available in 25 ft. rolls.

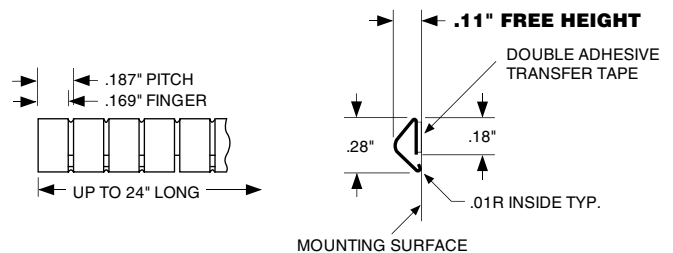

5230 Series Stick-on Mounting


• SEE PAGE 4 FOR HOW TO ORDER

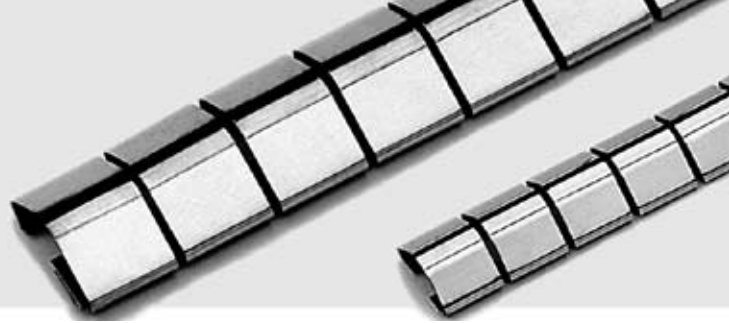

5230-13C32-XX SOFT NO-SNAG FINGERS

Compression Force


	25% Compression (0.083")	50% Compression (0.055")
Standard	14 lbs/ft	26 lbs/ft

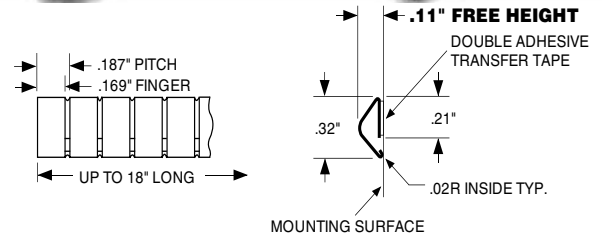

5230-14D37-XX SOFT NO-SNAG FINGERS

Compression Force


	25% Compression (0.098")	50% Compression (0.065")
Standard	10 lbs/ft	21 lbs/ft

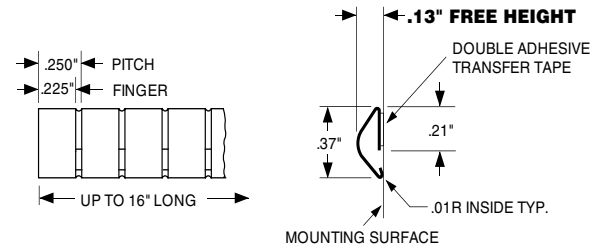

5230-15D50-XX SOFT NO-SNAG FINGERS

Compression Force


	25% Compression (0.098")	50% Compression (0.065")
Standard	10 lbs/ft	21 lbs/ft

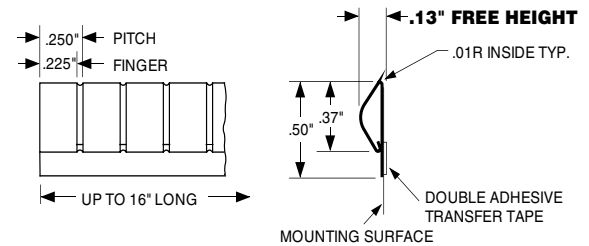

5230-16E60-XX SOFT NO-SNAG FINGERS

Compression Force


	25% Compression (0.165")	50% Compression (0.110")
Standard	10 lbs/ft 2.0 lbs/ft	20 lbs/ft 7.2 lbs/ft

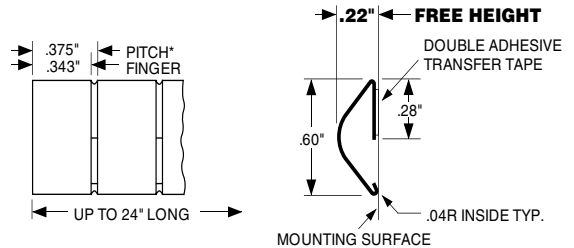

5230-17E80-XX SOFT NO-SNAG FINGERS

Compression Force

	25% Compression (0.240")	50% Compression (0.160")
Standard	7 lbs/ft	17 lbs/ft

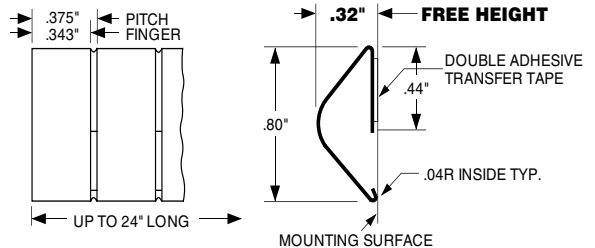


5230-18F110-XX SOFT NO-SNAG FINGERS


Compression Force

	25% Compression (0.300")	50% Compression (0.200")
Standard	12 lbs/ft	24 lbs/ft

Note: Up to 18" long.

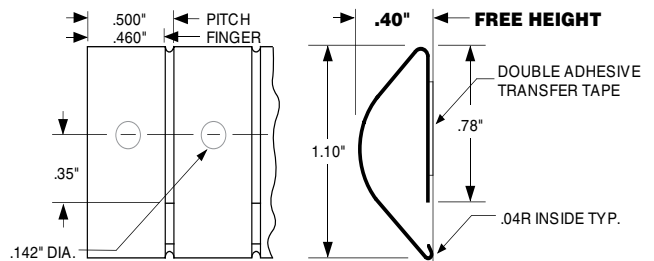

5230 Series Stick-on Mounting

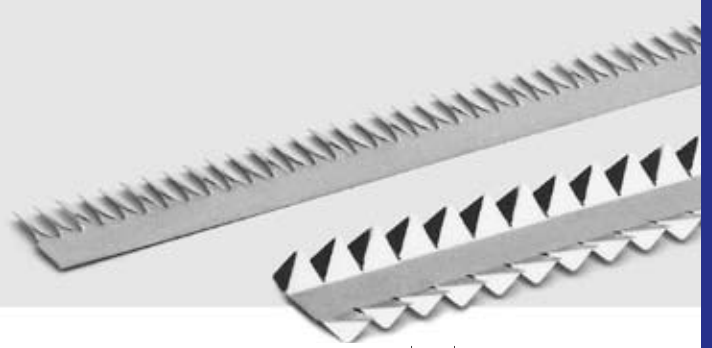


FINGERSTOCK - STICK-ON

5230-21E60-XX NO-SNAG FINGERS

Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard	13 lbs/ft	32 lbs/ft

Note: Also available in .187" Pitch.

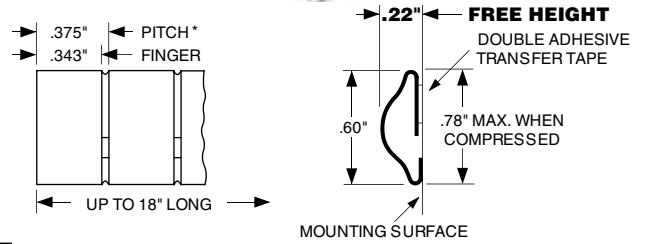


5230-24T95-XX TWISTED CONTACTS

Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard	5.8 lbs/ft	35 lbs/ft
"TF" Style	4.9 lbs/ft	19 lbs/ft

Notes: Also available in 25 ft. rolls.
 (SS) Also available in Stainless Steel

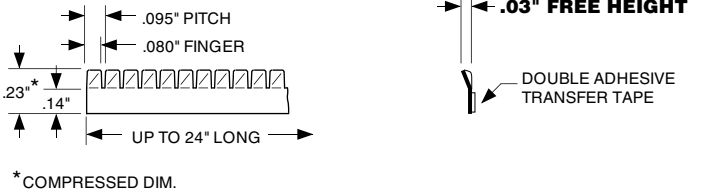


5230-25-95T90-XX TWISTED CONTACTS

Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard	12 lbs/ft	51 lbs/ft
"TF" Style	2.5 lbs/ft	10 lbs/ft

Note: (SS) Also available in Stainless Steel

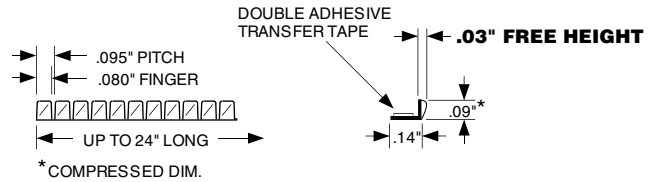


5230-26-165T-XX TWISTED CONTACTS

Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard	18 lbs/ft	36 lbs/ft
"TF" Style	4.2 lbs/ft	11 lbs/ft

Notes: Also available in 25 ft. rolls.
 (SS) Also available in Stainless Steel

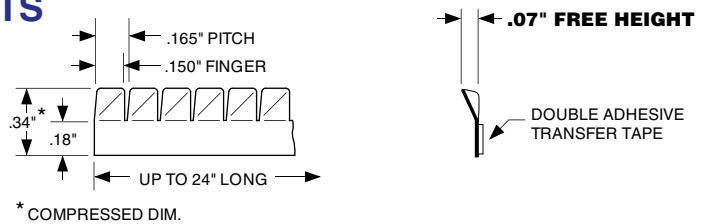


5230-27-165T-XX TWISTED CONTACTS

Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard	18 lbs/ft	36 lbs/ft
"TF" Style	4.2 lbs/ft	11 lbs/ft

Note: (SS) Also available in Stainless Steel

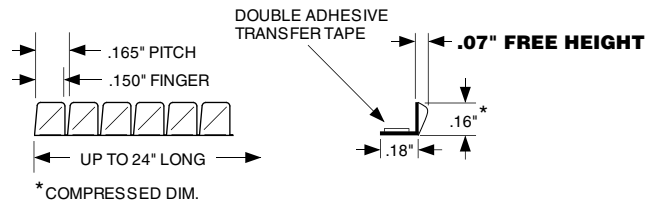

MAJR PRODUCTS